


Stock Solid Carbide Gundrills



Same day shipping.
Technical support available.
Ask us about custom applications.

Call **877-635-3488** for availability


Stock Solid Carbide Gundrills

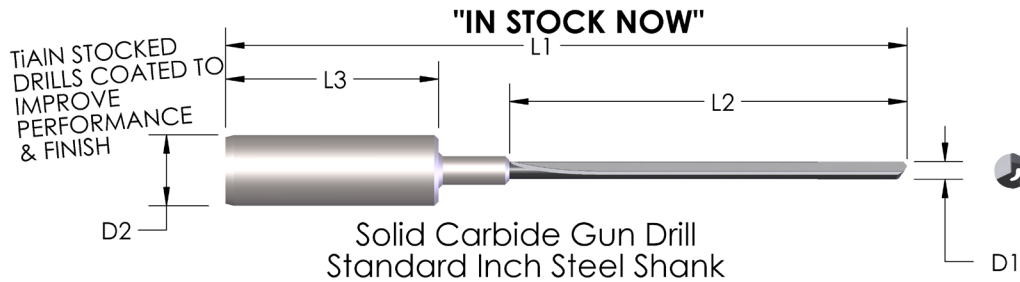

Specify size and length when ordering

Drill Dia.		List Price	Lengths				Shank Dia		Shank Length		Unsupported Length
D1 (Inch)	mm		L1 (in)	L1 (mm)	L2 in	L2 (mm)	D2 (in)	D2 (mm)	L3 (in)	L3 (mm)	L2/D1
0.0394	1.000	\$91	3.54	90	1.54	39	0.5	12.700	1.50	38.1	39
		\$91	4.53	115	2.53	64	0.5	12.700	1.50	38.1	64
0.0480	1.219	\$91	5.50	140	3.50	89	0.5	12.700	1.50	38.1	73
0.0550	1.397	\$91	6.00	152	4.00	102	0.5	12.700	1.50	38.1	73
0.0591	1.500	\$91	6.50	165	4.50	114	0.5	12.700	1.50	38.1	76
0.0625	1.588	\$91	5.00	127	3.00	76	0.5	12.700	1.50	38.1	48
		\$125	7.00	178	5.00	127	0.5	12.700	1.50	38.1	80
0.0669	1.700	\$91	7.00	178	5.00	127	0.5	12.700	1.50	38.1	75
0.0781	1.984	\$91	6.00	152	4.00	102	0.5	12.700	1.50	38.1	51
		\$125	10.00	254	8.00	203	0.5	12.700	1.50	38.1	102
0.0820	2.083	\$100	6.00	152	4.00	102	0.5	12.700	1.50	38.1	49
		\$125	10.00	254	8.00	203	0.5	12.700	1.50	38.1	98
0.0860	2.184	\$100	6.00	152	4.00	102	0.5	12.700	1.50	38.1	47
0.0937	2.380	\$105	6.00	152	4.00	102	0.5	12.700	1.50	38.1	43
		\$132	10.00	254	8.00	203	0.5	12.700	1.50	38.1	85
0.0984	2.500	\$105	6.00	152	4.00	102	0.5	12.700	1.50	38.1	41
		\$132	10.00	254	8.00	203	0.5	12.700	1.50	38.1	81
0.0995	2.527	\$105	6.00	152	4.00	102	0.5	12.700	1.50	38.1	40
		\$132	10.00	254	8.00	203	0.5	12.700	1.50	38.1	80
0.1094	2.779	\$105	6.00	152	4.00	102	0.5	12.700	1.50	38.1	37
		\$132	10.00	254	8.00	203	0.5	12.700	1.50	38.1	73
0.1250	3.175	\$143	10.00	254	8.00	203	0.5	12.700	1.50	38.1	64

Max Recommended unsupported length is 80 drill diameters long.
For drills longer, a bushing or deeper pilot hole will be required for added support.

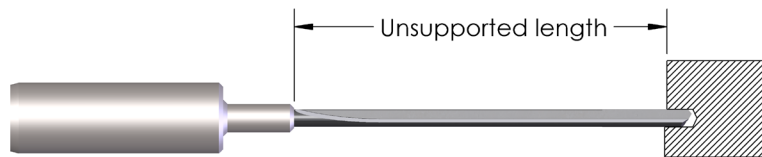

Starter pilot hole or drill bushing required.

Process

Pilot hole should be .005-.020mm (.0002-.0008") over drill size, and 1.5-2 Drill diameters deep.

Enter pilot hole with slow speed i.e. 300 RPM and 250-500mm/min (10-20IPM).

Engage Coolant then RPM before starting the drilling cycle

Please call for Price and Delivery if you have a special request not found in the table above.

*Pricing Effective February 2015



Star SU LLC
5200 Prairie Stone Parkway,
Suite 100
Hoffman Estates, IL 60192
Tel.: **847 649 1450**
Fax: **847 649 0112**
e-mail: sales@star-su.com
web: www.star-su.com

Star Cutter Company
Elk Rapids Engineering
210 Industrial Park Drive
Elk Rapids, MI 49629-0728
Tel.: **231 264 5661**
Fax: **231 264 5663**
e-mail: sales@starcutter.com
web: www.starcutter.com